

Product Descriptions

US Style LIBERTY On/Off Remote Control Kit

Model #: **BRT-690M (Transmitter)**
 BRT-690R (Receiver)

(Please visit our website www.a-brt.com for more info)



Features:

The Remote Control Kit consists of a BRT-690R Controller and a BRT-690M remote control switch that looks exactly like a standard wall mount switch. While the controller is usually installed near a load, the switch can be installed on top of a standard wall box or anywhere on the wall and it can be even detached from its wall mount plate to be used as a handheld device. The kit offers unprecedented freedom of control. With no need for wiring, it is perfect for retrofit.

- On/Off control up to 20m;
- Each BRT-690R controller can paired with up to 20 BRT-690M switches;
- Each BRT-690M switch control many loads that have paired BRT-690R controller installed;
- Good for all kind of loads;
- ABS-V0 flame resistance material;
- US 120 series design and high quality build.

Product Pictures:

Fig. 1 and Fig. 2 show the front view and the back view of the BRT-690M remote control switch respectively. It has one OFF button and three On/Off buttons on the front and snap-on notches on the back.



Fig. 1 690M Front View**Fig. 2** 690M Back View

By a quick press on the three On/Off buttons, the loads will be turned on or turned off as long as they have BRT-690R controllers installed and the controllers are paired with the buttons. The OFF button turns off all the loads by one press.

Fig. 3 and Fig. 4 show the top view and the bottom view of BRT-690R controller respectively. The unit has a SET button on the top and three terminal blocks for wiring on each side.

**Fig. 3** 690R Top View**Fig. 4** 690R Bottom View

Specification Parameters:

BRT-690M

Batteries	3V DC (2 x AAA)	Operation Environment	No-condensation 20-90% RH, -20℃ ~ 55℃
Remote Control Mode	RF (433MHz)	Remote Control Distance	Up to 20m
Dimension	120mm x 74mm	Weight	100g

BRT-690R

Input	100~254V(50Hz/60Hz)	Operation Environment	No-condensation 20-90% RH, -20℃ ~ 55℃
Output	120VAC-250W(Max) 220VAC-500W (Max)	Load Type	All kinds of loads
Wiring	Neutral required	Dimension	57.5*43.6*20.7mm
Color	White	Weight	55g

Wiring and Installation Guide:

Product Description of Remote On/Off Control Kit BRT-690M and 690R

Shenzhen Asia Bright Co., Ltd.

Floor 2nd~3rd, Building E, North Area No.2 of Shangxue Science Park, Bantian, Shenzhen, China

www.a-brt.com sales@a-brt.com

© 2022 All rights reserved. Subject to change without notices.

Installation of BRT-690M. BRT-690M comes with a base plate as shown in Fig. 5 and 4 mounting screws (not shown). The base plate can be installed on top of a standard wall box using the two mounting holes in the middle or anywhere on the wall using the four mounting holes in the corners.

Once the base plate is installed, BRT-690 can be directly snapped onto the base plate.

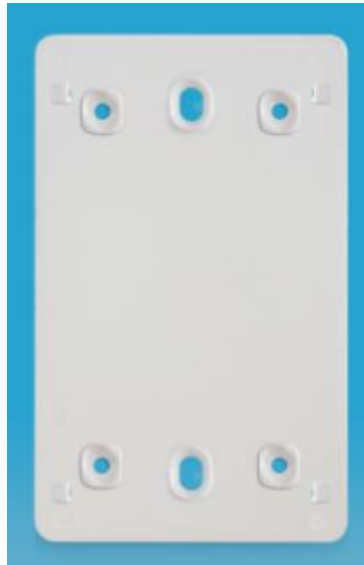


Fig. 5 Base Plate of BRT-690M

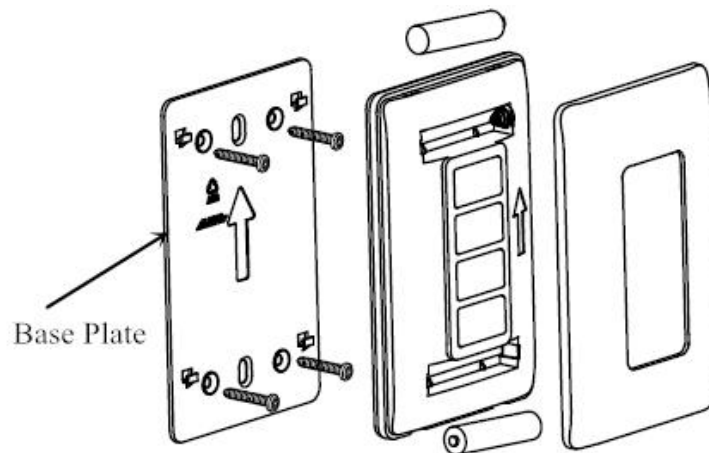


Fig. 6 Installation of BRT-690M

Fig. 6 shows how to install BRT-690M Remote Control Switch. There are three easy steps:

Step one: Use a screwdriver and the screws provided to install the base plate;

Step two: Install two AAA batteries into the battery holders and put on the cover;

Product Description of Remote On/Off Control Kit BRT-690M and 690R

Shenzhen Asia Bright Co., Ltd.

Floor 2nd~3rd, Building E, North Area No.2 of Shangxue Science Park, Bantian, Shenzhen, China

www.a-brt.com. sales@a-brt.com.

© 2022 All rights reserved. Subject to change without notices.

Step three: Attach the switch onto the base plate.

Installation and Wiring of BRT-690R. BRT-690R requires hot wire and neutral wire for installation. The ports have terminal blocks and are clearly labeled (as shown in Fig. 4). During installation, the corresponding wires are to be connected to each port and secured in place by tightening the screws of the terminal blocks.

Lin: Input hot wire
Lout: Output hot wire
N: Neutral wire
GND: Ground

Warning: *Please make sure power is turned off before starting installation!*

BRT-690R can usually be installed in a hidden space because of its small size and for safety reason. The following are two typical application scenes:



Fig. 7a BRT-690R Installed inside Ceiling Light

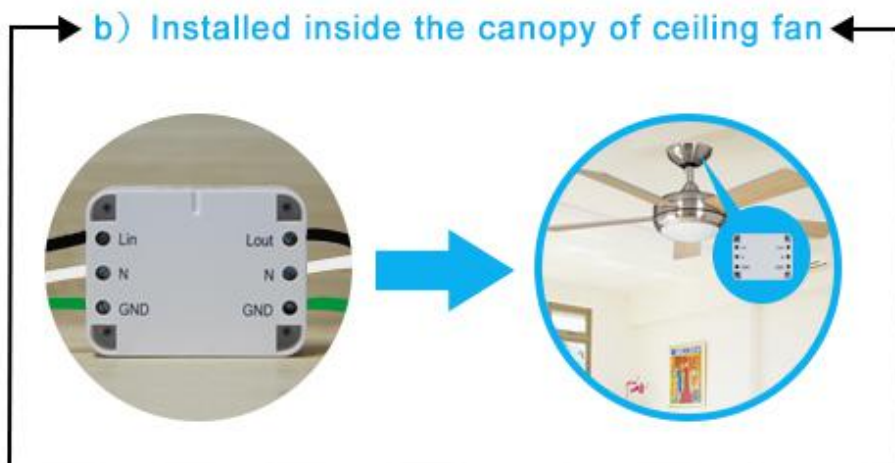


Fig. 7b BRT-690R Installed inside the Canopy of Ceiling Fan

***Note:** Each BRT-690R controller can be wired to power multiple loads, but the total load power must not exceed the power rating.*

Operation Guide:

After a BRT-690R controller is wired and powered on, a long beep sound will indicate the controller is set up properly. Then, it's time to link the controller with a BRT-690M remote control switch.

Pair the controller with an On/Off button of BRT-690M. Use a pin to press the SET button of BRT-690R twice, the controller will sound a short beep and enter the pairing state. Press the On/Off button of BRT-690M to be paired. Another short beep from the controller will indicate pairing has been established successfully. The paired On/Off button is ready to turn on or turn off the load with the paired controller remotely.

The pairing between a BRT-690R controller and an On/Off Button of BRT-690M can be removed by pressing and holding the SET button of BRT-690R for 3 seconds. A short beep from the controller will indicate pairing has been removed successfully.

Applications:

The LIBERTY On/Off Remote Control Kit brings us unprecedented freedom of control. Because it does not need wiring in the wall, it is perfect for retrofitting installations. The user will benefit greatly from saving money and time.

The kit has wide applications at various locations such as homes, restaurants, conference rooms, theater, etc. It can be used for turning on and turning off various loads such as fans, lights, appliances, or other kinds of electrical equipment.

How to Order:

Please contact us: Shenzhen Asia Bright Co., Ltd.
Floor 2nd~3rd, Building E, North Area No.2 of Shangxue
Science Park, Bantian, Shenzhen, China
Tel: +86-755-89748200 +86-755-89748211
Email: sales@a-brt.com Website: www.a-brt.com

Product Description of Remote On/Off Control Kit BRT-690M and 690R
Shenzhen Asia Bright Co., Ltd.
Floor 2nd~3rd, Building E, North Area No.2 of Shangxue Science Park, Bantian, Shenzhen, China
www.a-brt.com. sales@a-brt.com.
© 2022 All rights reserved. Subject to change without notices.

