



Product Name: LCD RF Ceiling Fan Remote Control Kit

Product Model: AS-CF129L

ABR 爱普瑞

Make your life easy, make your home cozy

Features:


This unit includes a U-shaped receiver and a LCD display transmitter (remote control). Transmitter and receiver use radio frequency technology to communicate and work at 433.92MHz. The receiver fits well in the fan's canopy, installs horizontally above the ball attachment. It is designed for fans that vary their speeds by changing the capacitance in the circuit. It will work on almost all fans with lights in the market.

- Fan Speed: High/Medium/Low;
- Capacitance for fan speed: 4 μ F for Medium speed, 2 μ F for Low speed;
- Fan Timer: 1h, 2h, 4h and 8h (custom settings available)
- Light function: On/Off
- Both the transmitter and receiver have 4 dip switches to avoid control interference from different remote controls. They must have the exactly same dip switch setting to work together.
- Battery for remote control: One 23A 12 Volts battery(not included)

Specifications:

Voltage	220~240V(50Hz/60Hz)	Operating temperature	0℃~55℃
Light load	600W(maximum)	Relative humidity	Non-condensing 20-90%
Motor load	150W(maximum)	Working distance	RF \geq 10m
Receiver dimension	Radius (60mm)	Receiver weight	101g
Transmitter dimension	138*49*23mm	Transmitter weight	55g

▶ **Wiring Diagram:**

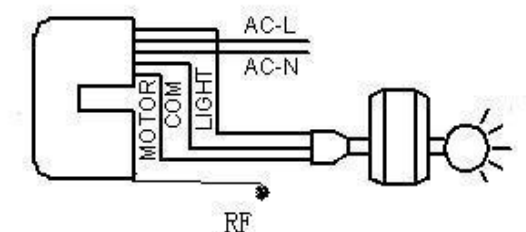

How to Order:

Please contact: Shenzhen Asia Bright Co., Ltd.
Floor 2nd~3rd, Building E, North Area No.2 of Shangxue
Science Park, Bantian, Shenzhen, China
Tel: +86-755-89602172/89748211
Email: sales@a-brt.com