



**Name: RF Ceiling Fan Remote Control Kit**

**Model: AS-CF239(UL)**

**ABR 爱普瑞**

**Make your life easy, make your home cozy**

#### **Features:**


This unit includes a rectangular receiver and a transmitter (remote control). Transmitter and receiver use radio frequency technology and work at 433.92MHz. The receiver fits well in the fan's canopy, installs horizontally above the ball attachment. It is designed for fans that vary their speeds by changing the capacitance in the circuit. It will work on almost all fans with lights.

- UL certificate for receiver;
- FCC certificate for remote control;
- Fan Speed: High/Medium/Low;
- Capacitance for fan speed: 10 $\mu$ F for Medium speed, 5 $\mu$ F for Low speed;
- Light function: On/Off;
- Both the transmitter and receiver have 4 dip switches to avoid control interference from different remote controls. They must have the exactly same dip switch setting to work together.
- Battery size for remote control: 6F22 9 Volts (not included)

#### **Specifications:**

Voltage	120V/60Hz	Operating temperature	0℃~55℃
Light load	400W(maximum)	Relative humidity	Non-condensing 20-90%
Motor load	120W(maximum)	Working distance	RF, $\geq 10$ m
Receiver dimension	120*53*23mm	Receiver weight	108g
Transmitter dimension	138*49*23mm	Transmitter weight	55g

▶ **Wiring Diagram:**

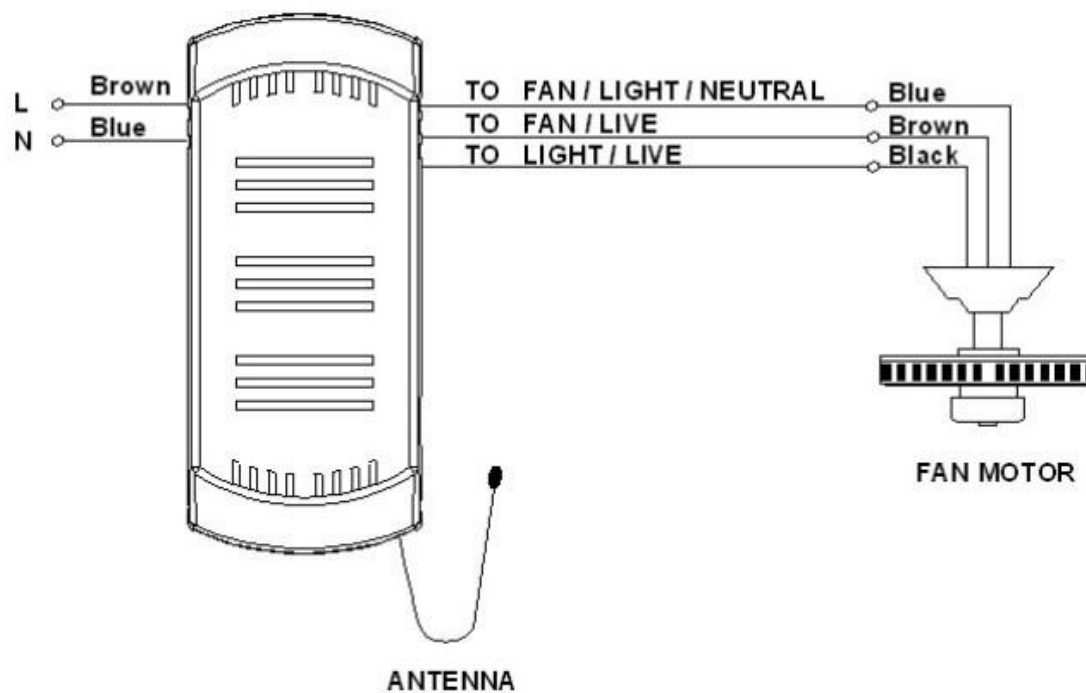

**How to Order:**

Please contact: Shenzhen Asia Bright Co., Ltd.  
Floor 2<sup>nd</sup>~3<sup>rd</sup>, Building E, North Area No.2 of Shangxue  
Science Park, Bantian, Shenzhen, China  
Tel: +86-755-89602172/89748211  
Email: sales@a-brt.com