

深圳市亚晔实业有限公司 Shenzhen Asia Bright Co., Ltd



Name: RF Ceiling Fan Remote Control Kit

Model: AS-CF239T

ABR- 罗普瑞

Make your life easy, make your home cozy

Features:

This unit includes a receiver and a transmitter (remote control). Transmitter and receiver use radio frequency technology to communicate and work at 433.92MHz or 315MHz. The receiver fits well in the fan's canopy, installs horizontally above the ball attachment. It is designed for fans that vary their speeds by changing the capacitance in the circuit. It will work on almost all fans with lights.

• Fan Speed: High/Medium/Low

• Light function: On/Off

 Both the transmitter and receiver have 4 dip switches to avoid control interference from different remote controls. They must have the exactly same dip switch setting to work together.


• Battery size for remote control: 23A 12 Volts (not included)

Specifications:

| Voltage | 220~240V(50Hz/60Hz) | Operating temperature | 0°C∼55°C |
|-----------------------|---------------------|-----------------------|-----------------------|
| Light load | 600W | Relative humidity | Non-condensing 20-90% |
| Motor load | 100W(maximum) | Working distance | RF, ≥10m |
| Receiver dimension | 120*53*23mm | Receiver weight | 108g |
| Transmitter dimension | 103*47*13mm | Transmitter weight | 39g |



Wiring Diagram:

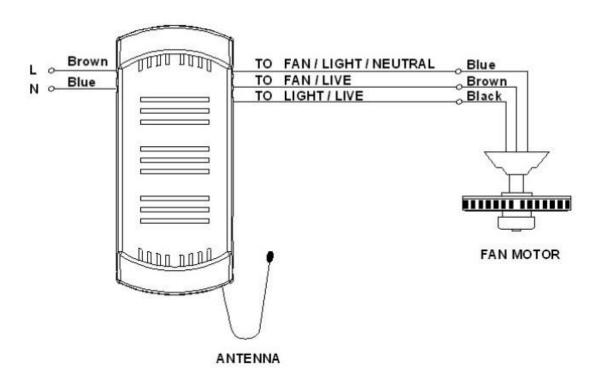

How to Order:

Please contact: Shenzhen Asia Bright Co., Ltd.

Floor 2nd~3rd, Building E, North Area No.2 of Shangxue

Science Park, Bantian, Shenzhen, China

Tel: +86-755-89602172/89748211

Email: sales@a-brt.com