



**Product Name: LCD RF Ceiling Fan Remote Control Kit**

**Product Model: AS-CF249L**

**ABR 爱普瑞**

**Make your life easy, make your home cozy**

### **Features:**


This unit includes a rectangular receiver and a LCD display transmitter (remote control). Transmitter and receiver use radio frequency technology to communicate and work at 433.92MHz. The receiver fits well in the fan's canopy, installs horizontally above the ball attachment. It is designed for fans that vary their speeds by changing the capacitance in the circuit. It will work on almost all fans with light bulbs.

- Fan Speed: High/Medium/Low;
- Capacitance for fan speed: 4 $\mu$ F for Medium speed, 2 $\mu$ F for Low speed;
- Fan Timer: with 1h, 2h, 4h or 8h delay off settings(custom settings available);
- Light On/Off/Dimmer: on/off for light or brightness adjustment;
- Light Delay off: light is delayed off after 3 minutes;
- Both the transmitter and receiver have 4 dip switches to avoid control interference from different remote controls. They must have the exactly same dip switch setting to work together;
- Battery for remote control: One 23A 12 Volts battery(not included).

### **Specifications:**

Voltage	220~240V(50Hz/60Hz)	Operating temperature	0℃~55℃
Light load	400W(maximum)	Relative humidity	Non-condensing 20-90%
Motor load	100W(maximum)	Working distance	RF, $\geq 10$ m
Receiver dimension	120*53*23mm	Receiver weight	108g
Transmitter dimension	103*47*13mm	Transmitter weight	45g

▶ **Wiring Diagram:**

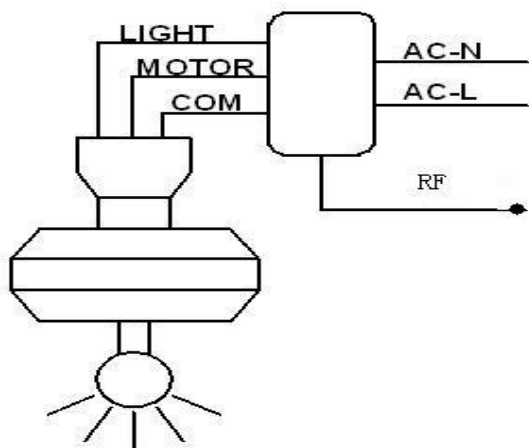

**How to Order:**

Please contact: Shenzhen Asia Bright Co., Ltd.  
Floor 2<sup>nd</sup>~3<sup>rd</sup>, Building E, North Area No.2 of Shangxue  
Science Park, Bantian, Shenzhen, China  
Tel: +86-755-89602172/89748211  
Email: sales@a-brt.com