



**Product Name: LCD Infrared Ceiling Fan Remote Control Kit**

**Product Model: AS-CF226L**



**Make your life easy, make your home cozy**

#### **Features:**


This unit includes a T-shaped receiver and a transmitter (remote control). Transmitter and receiver use infrared technology to communicate. The receiver fits well in the fan's canopy, installs horizontally above the ball attachment. It is designed for fans that vary their speeds by changing the capacitance in the circuit. It will work on almost all fans with lights in the market.

- Fan Speed: High/Medium/Low;
- Capacitance for fan speed: 4 $\mu$ F for Medium speed, 2 $\mu$ F for Low speed;
- Fan Timer: 1h, 2h, 4h and 8h (custom settings available);
- Light function: On/Off;
- Remote control working distance: more than 5 meters;
- Receiver with two infrared sensors installed at 180 degree opposite side out of the canopy, it can achieve 360 degree sensing range and no blind angle.
- Battery for remote control: One 23A 12 Volts battery (not included).

#### **Specifications:**

Voltage	220~240V(50Hz/60Hz)	Operating temperature	0℃~55℃
Light load	600W(maximum)	Relative humidity	Non-condensing 20-90%
Motor load	100W(maximum)	Working distance	IR, $\geq$ 5m (360°)
Receiver dimension	110*60*21mm	Receiver weight	101g
Transmitter dimension	103*47*13mm	Transmitter weight	55g

▶ **Wiring Diagram:**

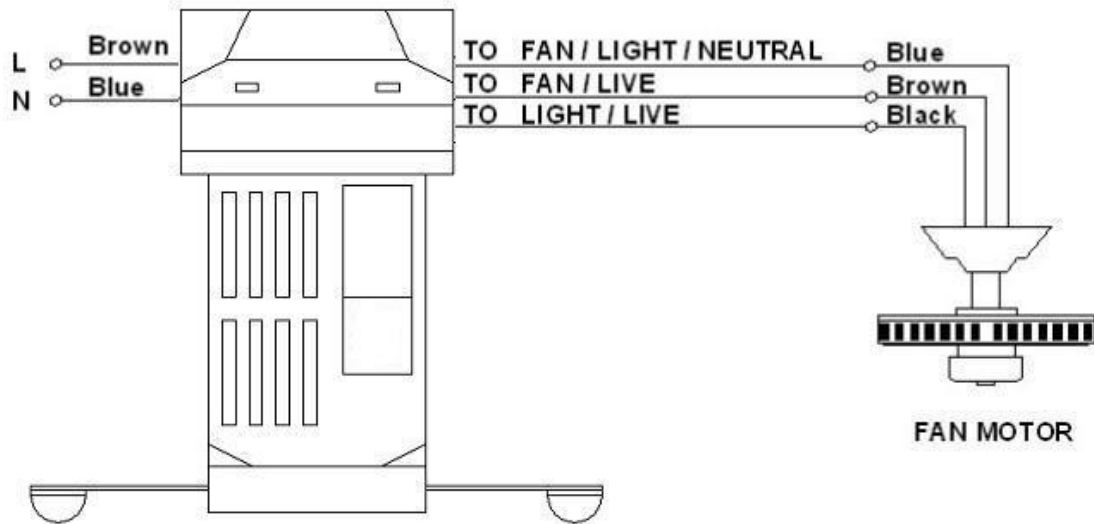

**How to Order:**

Please contact: Shenzhen Asia Bright Co., Ltd.  
Floor 2<sup>nd</sup>~3<sup>rd</sup>, Building E, North Area No.2 of Shangxue  
Science Park, Bantian, Shenzhen, China  
Tel: +86-755-89602172/89748211  
Email: sales@a-brt.com