



Name: Glass Screen Remote Switch for 4 loads

Model: BRT-611

ABR 爱普瑞

Make your life easy, make your home cozy

Features:


BRT-611 is an upgraded model of BRT-601; it's a Micro-chip Glass Screen Remote Switch for 4 loads. It controls ON/OFF of the 4 loads, and with delay off time setting function. It usually applied to Drawing Room, Office and Meeting room, to control the fan and lights.

- Operates on a 2 wire system, and fits in a standard wall box;
- One line for motor control, and another 3 lines for light control;
- Delay off time setting function, you can select delay off time for any load. After you switch OFF all of the loads, the preset load will automatic OFF after 10 seconds delay;
- One button switch off function;
- Good for AC motor and all types of lights;
- Wallplate uses flame resistance ABS-V0 material for safety;
- Classical 86 series design and easy installation.

Specifications:

Voltage	220~240V(50Hz/60Hz)	Operating temperature	0℃~55℃
Light load	3*1000W(maximum)	Relative humidity	Non-condensing 20-90%
Motor load	100W(maximum)	Remote control	Infrared
Remote control	Infrared	IR Remote distance	≤7m
Installation hole spacing	60mm	Matching wall box	75*75*50mm
Switch dimension	86*86*43mm	Switch weight	112g
Remote control dimension	107*36*14mm	Remote control weight	31g

▶ **Wiring Diagram:**

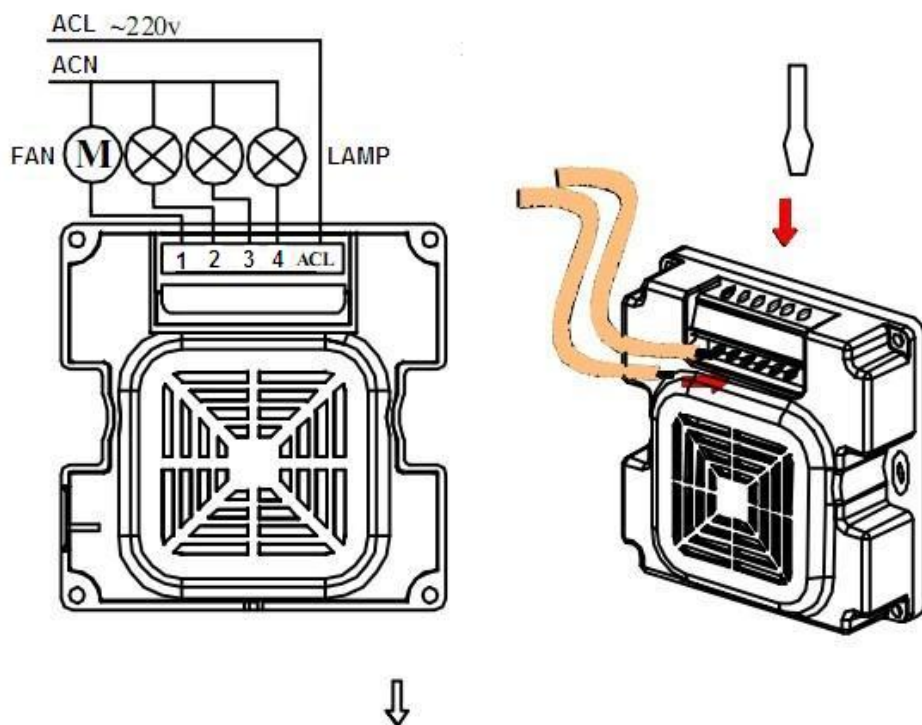

How to Order:

Please contact: Shenzhen Asia Bright Co., Ltd.
Floor 2nd~3rd, Building E, North Area No.2 of Shangxue
Science Park, Bantian, Shenzhen, China
Tel: +86-755-89748200 / 89748211
Email: sales@a-brt.com Website: www.a-brt.com.